

P140XS

The P140XS is equipped with proven REGLOPLAS technology and with all the advantages of the REGLOPLAS large unit series, in the temperature range up to 140 °C medium temperature.

- Control system RT200 or RT100
- Pump with high flow rate: 11 l/min
- Low-scaling cooling system "SK"



Technical specifications

Heat transfer medium	Outlet temperature	Heating capacity at 400V	Cooling capacity		Pump capacity/Type		
			130 °C	38 kW	SG14	11 l/min	0.14 kW
Water	140 °C	3 kW					

Technical data

Outlet temperature		
max.	°C	140
Heat transfer medium		Water
Filling quantity	l	0.5
Expansion volume	l	-
Heating capacity at 400V	kW	3
Cooling capacity	kW	38
Cooler		1K
at outlet temperature	°C	130
at cooling water temperature	°C	20
Pump capacity/Type		SG14
Flow rate max.	l/min	11
Power consumption	kW	0.14
Pressure max.	bar	3.7
Control system		RT100 / RT200
Measuring mode (standard)		Pt100
Operating voltage	V/Hz	400 V, 50 Hz, 3 PE
Connections		
Outlet/Inlet		G3/8"
Cooling water mains		G1/4"
Degree of protection		IP54
Dimensions W/H/D	mm	143/420/520
Weight	kg	25
Color	RAL	9006
Ambient temperature		
max.	°C	40
Noise level	db (A)	< 70


Standard equipment

- Filter in the main circuit
- Filter in cooling water circuit
- Leak-free pump
- Water circuit of non-rusting materials
- Automatic water refill
- Solid-state relay (SSR) instead of heating contactor
- Unit in IP54 protection degree
- Indirect cooling (1K)


Options

- Electronic flow measurement
- Hand valve in inlet and outlet

Pump curve

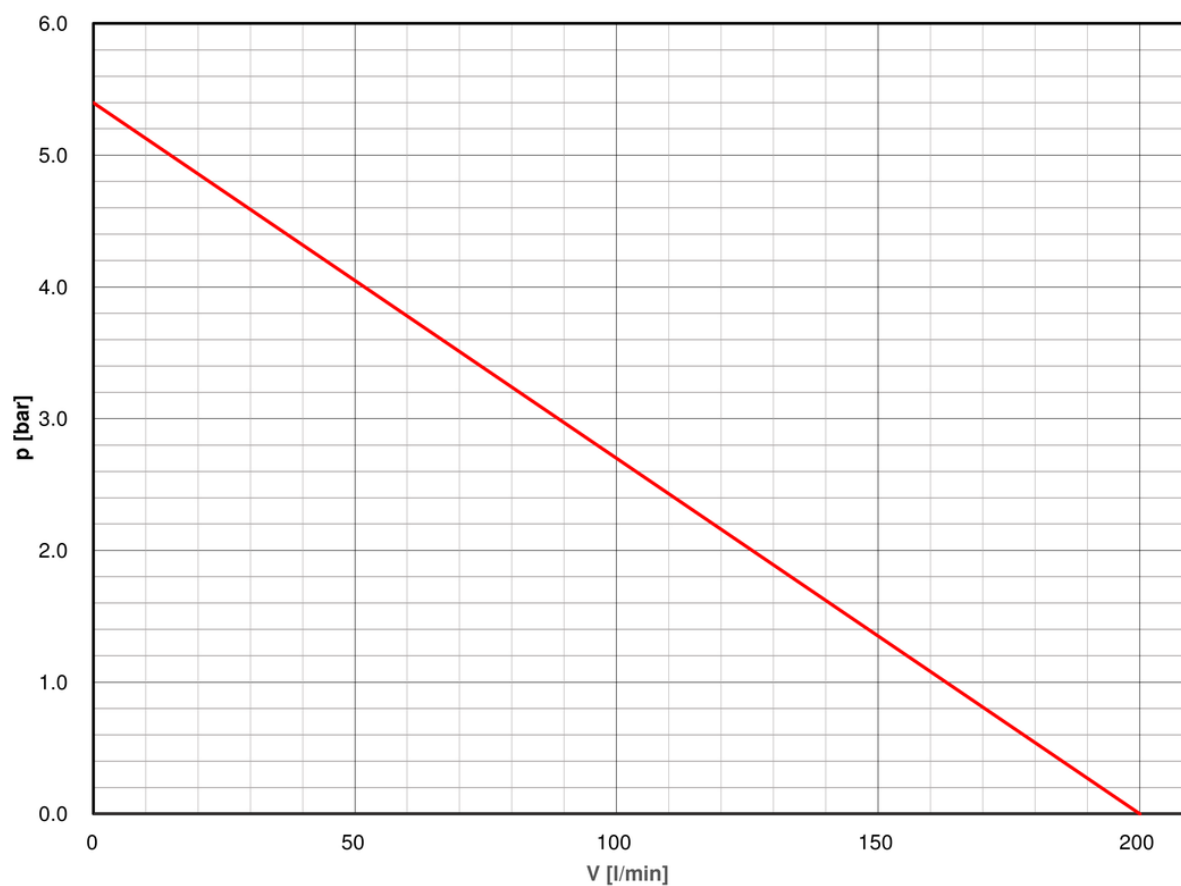

Cooling curve

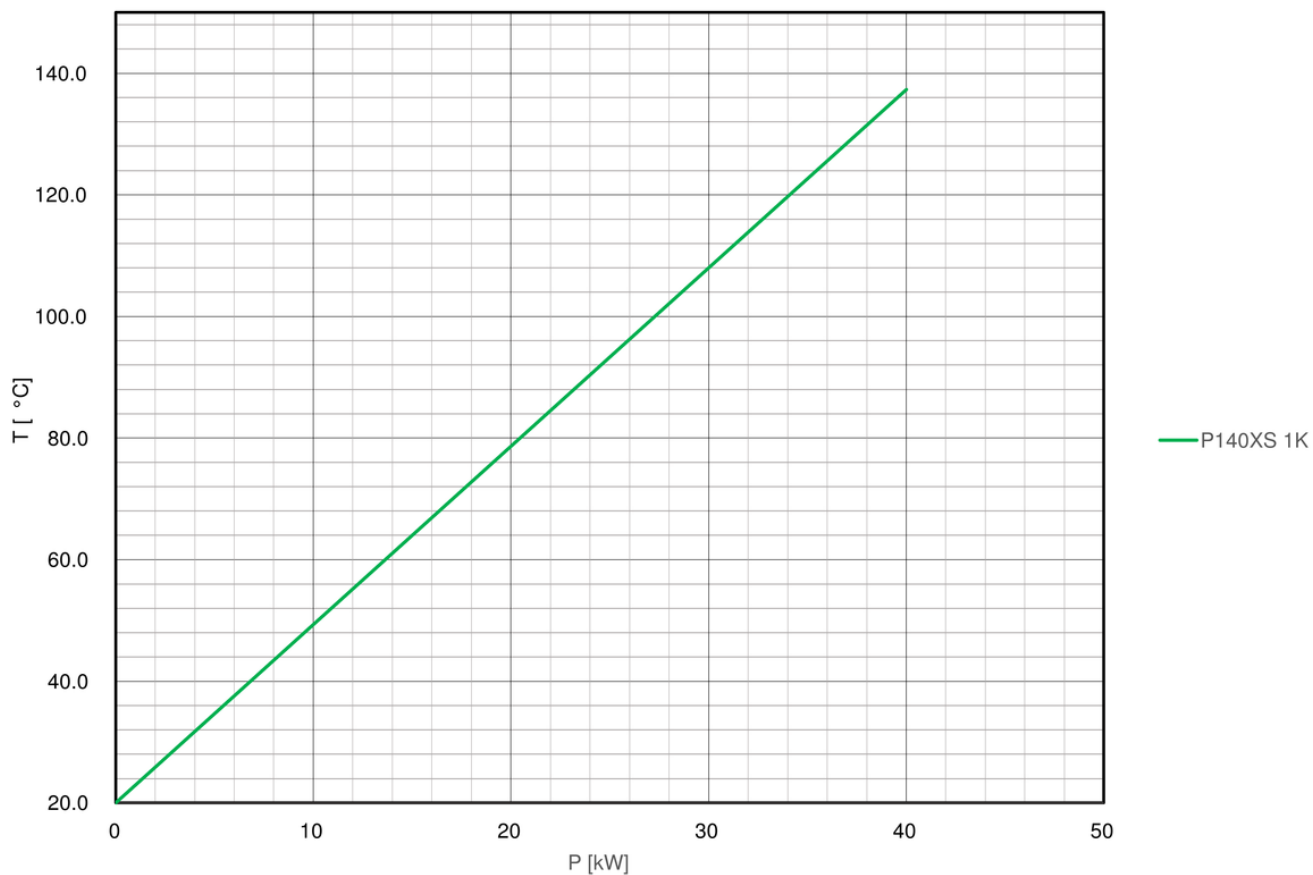

Representation Slovenia

Uniplast Inzeniring d.o.o
 Pod Hruševco 46c,
 1360 Vrhnika
 Slovenia

Tel + 38 61 5659 440
 Email info@uniplast.si